



How to turn the Wi-Fi off on your modem/router combo unit

(Click on your model below)

[Arris – Model TG862](#)

[Comtrend – Model AR5312/AR5319](#)

[Comtrend – Model 3120](#)

[Netgear – Model DGND3700v2](#)

Arris – Model TG862


- Open up your web browser.
 - o In the address bar put: **192.168.0.1** and then hit enter.
- It will ask you for a username and a password.
 - o The username is: **admin** and the password is: **password**
- Once you are in the router:
 - o Click on **Basic Setup** and **uncheck the Enable Wireless** check box.
 - o **Save** this configuration.
- You may now close your browser.

The screenshot shows the 'System Basic Setup' page of an Arris TG862 router. The page has a navigation bar with tabs for 'Basic Setup', 'WAN Setup', 'LAN Setup', 'Wireless Setup', 'Firewall', and 'Utilities'. The 'Basic Setup' tab is active. Below the navigation bar, there is a sidebar with 'BASIC SETUP' and 'BASIC SETUP' buttons. The main content area is titled 'System Basic Setup' and contains a paragraph of instructions. Below this, there is a 'Basic Setup' section with various configuration options. The 'Enable Wireless' option is highlighted with a red box and is currently unselected. Other options include Host Name (ARRISGW), Wireless Network Name (SSID) (ARRIS-E3B2), Broadcast Network Name (SSID), User Name (admin), Change Password, Tx Power Level (High), Channel (Auto), Language (English), and Security Mode (WPA2-PSK).

Basic Setup	
Host Name	ARRISGW ?
Enable Wireless	<input type="checkbox"/> ?
Wireless Network Name (SSID)	ARRIS-E3B2 ?
Broadcast Network Name (SSID)	<input checked="" type="checkbox"/> ?
User Name	admin ?
Change Password	Change Password ?
Tx Power Level	High ?
Channel	Auto ?
Language	English ?
Security Mode	WPA2-PSK ?

Comtrend AR5312/AR5319

- Open up your web browser.
 - o In the address bar put: **192.168.1.1** and then hit enter.
- It will ask you for a username and a password.
 - o The username is: **root** and the password is: **12345**
- Once you are in the router:
 - o Click on **Basic Setup** along the top.

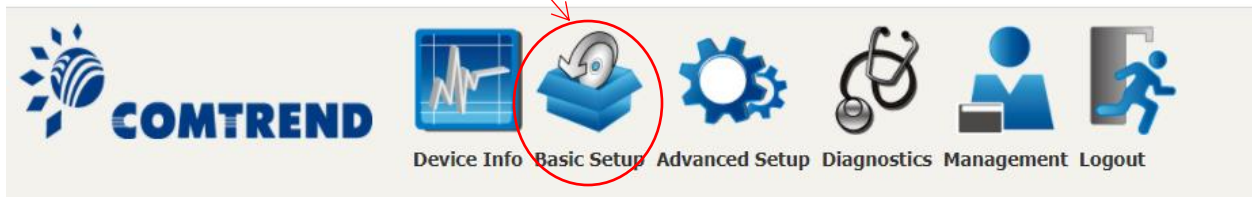

- In the left-hand column click on **Wireless**.



- **Uncheck** the **Enable Wireless** check box.
- Hit the **apply/save** button.

Wireless -- Basic

This page allows you to configure wireless settings. Click "Apply/Save" to configure the settings.

Enable Wireless

Hide Access Point

Clients Isolation

Disable WMM Advertisement

Enable Wireless Multicast

Enable WiFi Button

SSID:

BSSID:

Country:

Max Clients:


Wireless - Guest/Virtual Accounts

Enabled	SSID
<input type="checkbox"/>	wl0_Guest1
<input type="checkbox"/>	wl0_Guest2
<input type="checkbox"/>	wl0_Guest3

- You may now close your browser.

Comtrend 3120

- Open your web browser.
 - o In the address bar put: **192.168.1.1** and then hit enter.
- It will ask you for a user name and a password.
 - o The username is: **root** and the password is: **12345**
- Once into the router:
 - o Click on **Basic Setup** along the top.

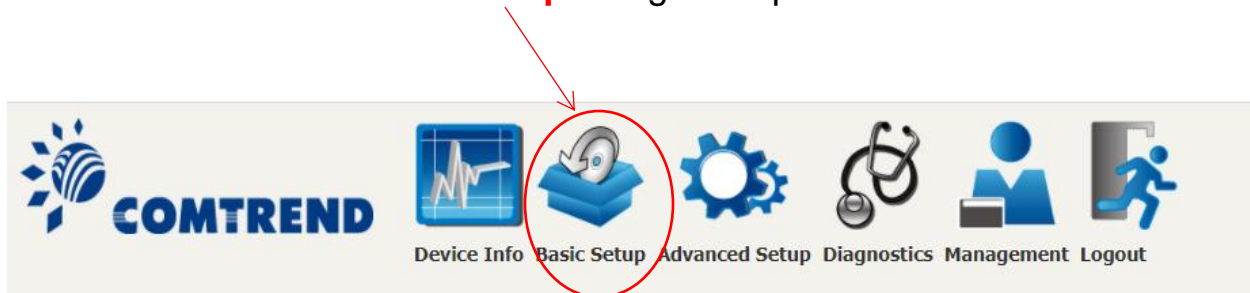

- In the left-hand column click on **Wireless**
 - o Underneath **Wireless** click on **2.4GHz**.
 - o **Uncheck** the **Enable Wireless** check box.

WAN Setup
NAT
LAN
Wireless
2.4GHz
Basic
Security
5GHz
WifiXtend
Parental Control
Home Networking

Wireless -- Basic


This page allows you to configure basic features of the wire.
Click "Apply/Save" to configure the basic wireless options.

- Enable Wireless
- Hide Access Point
- Clients Isolation
- L2 Isolation
- Disable WMM Advertise
- Enable Wireless Multicast Forwarding (WMF)

- Hit the **apply/save** button at the bottom of the page.

Apply/Save

- You will need to **repeat** the above steps for the 5GHz signal as well. Click on **5GHz** and **uncheck** the **Enable Wireless** check box.

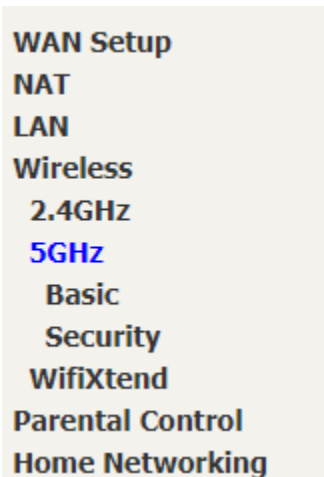

Wireless -- Basic

This page allows you to configure basic fe:
Click "Apply/Save" to configure the basic w

Version: A.374097.CTU.C08

- Enable Wireless
- Hide Access Point
- Clients Isolation
- L2 Isolation
- Enable Wireless Multicast Forwar


- Hit the **apply/save** button at the bottom of the page.

Apply/Save


- You may now close your browser.

Netgear DGND3700v2

- Open up a web browser. In the address bar put: **192.168.0.1** and then hit enter.
- It will ask you for a user name and a password.
 - o The username is: **admin** and the password is: **password**
 - o
- Once you are in the router
 - o You will click on the **Basic** tab.
 - o Click on **Wireless**.

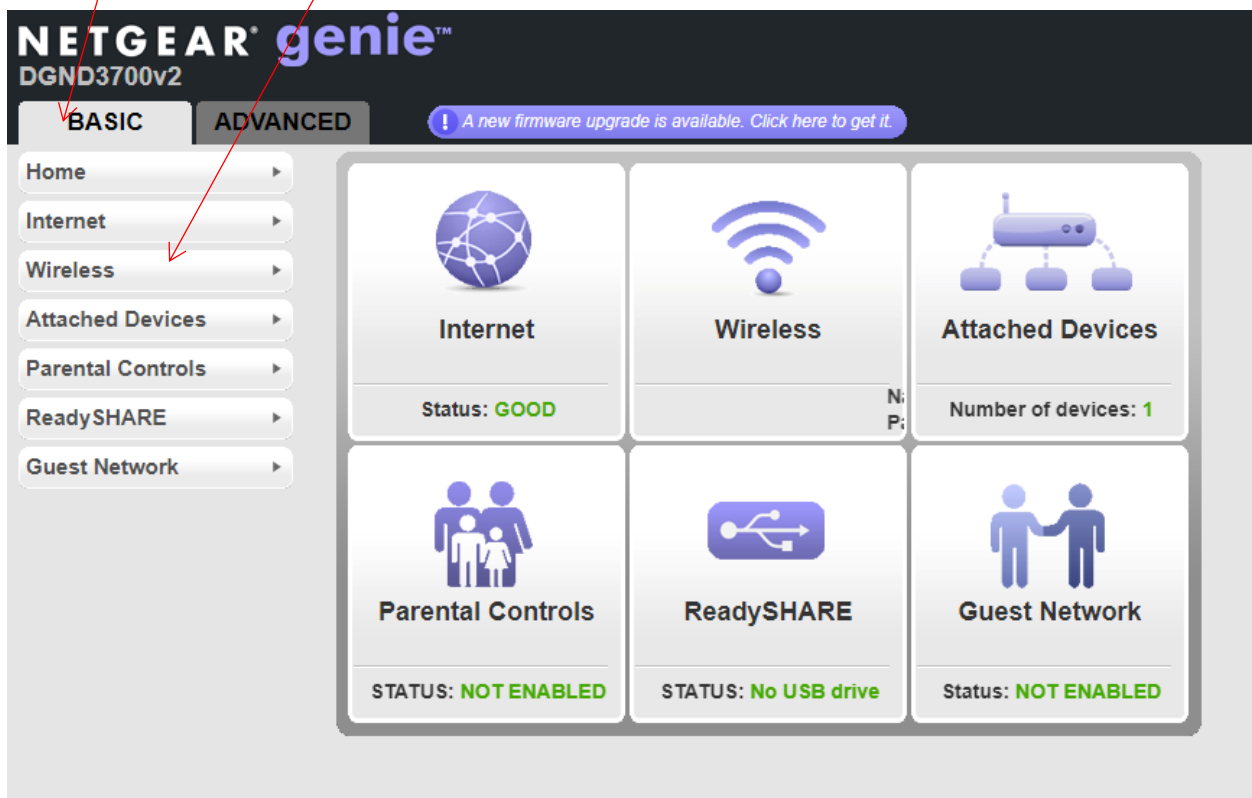

- Next you will see **Wireless Network (2.4GHz b/g/n)** and **Enable SSID Broadcast** with a check next to it.
 - o **Uncheck** the **Enable SSID Broadcast**.
- On the same page but now on **Wireless Network (5GHz a/n)**.
 - o **Uncheck** the **Enable SSID Broadcast**.

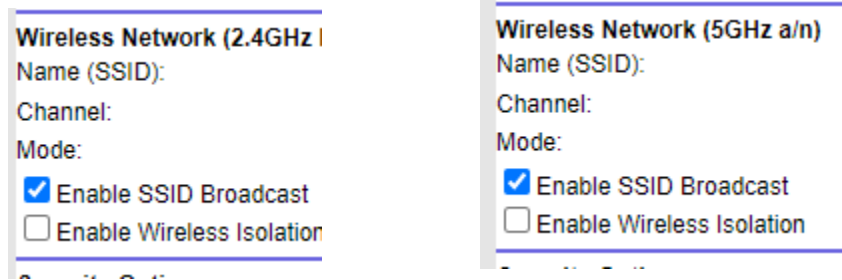

- Now hit the **green** apply button at the top of the page.



- You may now close your browser.